Digital Intelligent AVR (Three Phase)



New Generation Digital Logic Combined Functional Setting. Complete Capacity and Specifications, CE Certified. The Series is designed of built-in multiple functions digital meters, in conjunction of indicators. The equipment is easy in operation. Joining with a number of patents and anti-mistake engineering design. The producing procedure meet international standard, with high quality and long MTBF, the serial equipment are good for all kinds load and sites.

Features:

- Microprocessor Control Unit (MCU) controlled regulation
- Multi-Phase, Multi-Function and Real-time measuring system Single-Chip (EMP)
- Built-in patented bypass device for equipment protection
- Big range high / low voltage protection device
- Phase loss, instant black-out and short circuit protection device
- Solid-state zero point transform drive circuit
- Start Over Voltage Protection (SOVP)
- Independent regulation and protection design
- Built-in digital voltmeter on internal panel for monitoring voltage, frequency and other electricity information

- Signals of the AVR is totally in True RMS treatment
- Internally and externally built multi-function state indicators
- New type 4-digit safety password setting functions
- Electronic double circuitry switch design
- Full series with the same control system and multi anti-mistake circuit design
- Separate voltage regulation design, 3 phases imbalance 100%
- Taiwan patent no. 160215 and 162577
- China patent no. 125595 & 390066
- Double overload and short circuit protection

Scope of Application:



PCB Drilling Machine



Integrated Processing Machine



SMT



EDM




Milling Machine




Al Component Inserting Machine

Digital Intelligent AVR







Digital Linear Voltage Regulating Mode:

Digitalized control joining with linear voltage regulation enables equipment to obtain precise and stable voltage

True RMS Voltage:

Measuring voltage with RMS value. The unit output voltage without being affected by waveform distortion

Innovative Panel Design

The indicator color of panel can find the voltage state for each phases of the AVR

Humanized Anti-Mistake Circuit Design:


To prevent from inappropriate operation or touch by which causing AC output switch ON or OFF, the AVR has a very delicate Electronic Double-Circuit Control design, one must simultaneously push two ONs or two OFFs to start or shutdown the AVR

Digital Circuit Instrument Design

Three Phase Output Over Voltage Indicator (Red)

Three Phase Output Low Voltage Indicator (Red) Electronic Double-Circuit O/P ON Switch

Electronic Double-Circuit O/P OFF Switch



Three Phase Normal Output Voltage Indicator (Green)

AC Output Indicator (Green) Green Start Red Break


Digital Controlled Main Control Circuit

Digital control intelligent main control PCB with true RMS value digital control and actually solve the issue of waveform distortion

Digitally display voltage, frequency and all other valued of power system

5 multiple function setting button for setting protection function values for each phase

Concealed Power Switch equipped with additional Overload Protection

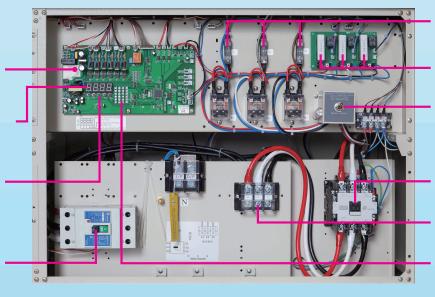

3 Phase separated overload and short circuit protection

Eliminating noise interference device

Bypass device (having high/low voltage and phase loss function under bypass state)

Abnormal voltage tripping contactor

Output terminal

Light up of indicators display state of each phase, clear and precise



Grinding Machine



WEDM



Production Process
Equipment



SMT



Laboratory



Medical Monitoring Equipment

Big Range High / Low Voltage Protection:

Whether precise equipment or heavy load equipment or power supply with wide range variation area, the Digital Intelligent AVR has a very special feature design of Various/Multi/Big range Select to pre-set the most appropriate and precise adjustment in accordance with the load equipment.

Multi-Function Display Setting and Self- Detection:

This Digital Intelligent AVR allows site review, setting, adjustment and testing of each phase voltage, frequency...etc. This unit is a voltage regulator and also 3 phase power testing instrument. The AVR is also equipped with self-detection functions and in conjunction of indicator, the present situation can be reported at any time.

Largest Angle Adjusting Capability:

Since the adjustable angle is larger than 690 degrees, plus microprocessor with digital setting control, it can easily reach best precision for output voltage and without occurred with oscillation issues.

Main Control Board Are Processed in SMD and SMT:

The main control elements are processed with SMD and SMT for increasing stability and reliability. And effectively promote the overall efficiency as well as reduce using space.

All Signals of The Entire AVR Is Treated in True RMS:

The only AVR in True RMS operation and measuring both domestically and overseas, which really solve the problem of voltage regulation due to waveform distortion.

Solid-State Zero Point Transform Drive Circuit (STD):

The AVR Control Drive Circuit adopts Solid-State Element and Zero Point Transform techniques, free of noise, free of interference and it makes the AVR output power supply cleaner.

All Module Design:

All the technical design inside the Digital Intelligent AVR is of Module Designed and separately assembled, components used on PCB are very stringently quality controlled and tested by computerized ICT satisfactory quality reliability.

Widest Range Voltage Regulation Capability:

In order to attain the widest range voltage regulation, the built-in whole range DC Power Supply, allows for single phase and three phase power input at the same time. When inputting three phase power, even at phase loss the control PCB can still work normally.

Adopt Latest EMP and MCU:

In order to promote computing speed and measuring function, multi-phase, multi-function real time measuring system single chip EMP is adopted, matched with Microprocessor Control Unit provide the AVR further jumped to computerization.

All-New Intelligent Voltage Regulation Control Circuit:

The best optimal parameters can be set according to actual condition in use, such as change of input voltage and output load.

Double Overload and Short Circuit Protection:

Three Phase overload and Short Circuit protection by internal fuse and input circuit breaker, they can prevent the components damaged due to extra overload.

Phase Loss and Instant Black-Out Protection:

When input power is with phase loss or instant black-out, the AVR will trip off and display when it is detected. After power recover, please re-start up the switch, then the AVR will supply the pure and clean power.

Digital Display



Digitally display the functions of voltage and frequency of all phases

Easy and Precise Setting



Press button setting of voltage and frequency of all phases. Functions are complete and operations are easy

SOVP Device



Whether it is switched on or recover from power outage, the Start Over Voltage Protection will always re-start from low voltage, won't have high voltage output

Multi-Function State Display



All states of various power are displayed in indicator allowing for determine the condition of the AVR clearly

Noise Preventing Device



The AVR is installed in extra arc suppressor and noise interference prevention devices

Separated Regulation



Three phase separate regulators design for attaining precise output

I/P & O/P Wires Protection



Wiring fixed, input/ output wires well sealed, stable & safety

Bypass Device



It allows for bypassing at of protection and maintenance. And when bypassed, the protection functions is still working

H Class Protection



With Class H insulation materials transformer

Model & Specification:

Model No. (PR-)		310 X/N/Y	315 X/N/Y	320 X/N/Y	330 X/N/Y	345 X/N/Y	360 X/N/Y	375 X/N/Y	3100 X/N/Y	3120 X/N/Y	3150 X/N	3180 X/N	3200 X/N	
Capacity (KVA)		10	15	20	30	45	60	75	100	120	150	180	200	
Voltage		$ \begin{array}{llllllllllllllllllllllllllllllllllll$												
Main Structure		Digital logic linear voltage regulation mode												
Voltage Regulating Signals														
Power Factor		0.95~1												
Efficiency		≥98%												
Response time		< 0.1 Second												
Waveform Distortion		No distortion												
Protection	High Voltage	Standard feature (any high voltage tripping point value is set digitally)												
	Low Voltage	Standard feature (any low voltage tripping point value is set digitally)												
	Phase Loss	Standard feature (any phase loss tripping point value is set digitally)												
Bypass		Standard feature (with High / Low Voltage, Phase Loss, Instant Trip Protection at work)												
Indicators	Power	Standard feature												
	Voltage		Standard feature(three phase voltage is equipped with digital meter display)											
	Abnormal		Standard feature											
Safety Protection						4-digit	t safety p	assword	setting					
Overload						1:	50% for	10 secon	ds					
Environment				Гетрегаt	ure:0°C	~45°C	Humi	dity:0%	~95% R	H (Non-	Condens	ing)		